


# F2510AF TYPE

1B1S/ メタルインペラ  
(25x25x10.2mm)

Dimensions: Not to scale

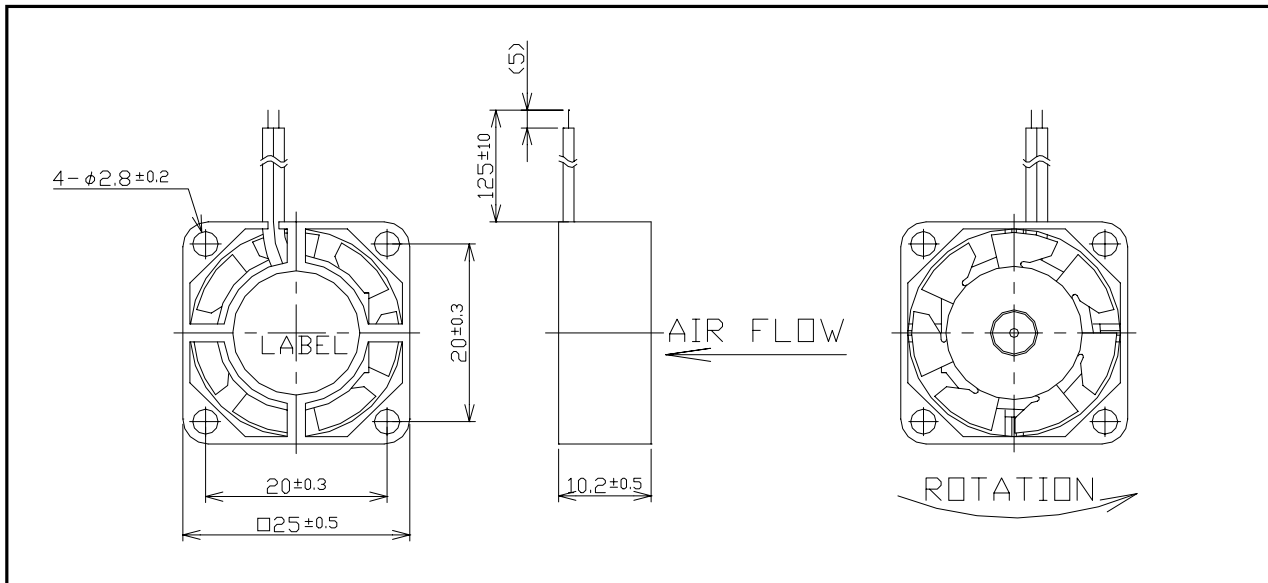

## Specifications

機種名 (Model)	F2510AF-05UCW F2510AF-12UCV				
定格電圧 (DCV)	5	12			
Rated voltage					
使用電圧範囲 (DCV)	4.5~5.5	10.3~13.8			
Operating voltage range					
定格電流 (A)	0.13	0.09			
Rated current					
定格入力 (W)	0.65	1.08			
Rated input					
最大風量 (m <sup>3</sup> /min)	0.04	0.04			
Max Air Volume					
最大静圧 (Pa)	20.6	20.6			
Max Static Pressure					
A特性音圧レベル (dB)	25	25			
Noise Lv at 1m (A-weighted)					
回転速度 (min <sup>-1</sup> )	7,500	7,500			
Rotation frequency					
期待寿命 (h)	50,000				
Life expectancy	★ Room temp-humidity				

使用温度範囲(Operating temp. range) :

-5~+60°C(5V), -10 ~ +60°C(12V) ★★

保存温度範囲(Strage temp. range) :

-40 ~ +70 ★★

リード線(Lead Wire) :

UL1007 AWG28: {5V: Red(+), Green(-)}, {12V: Red(+), Black(-)}

重量(Weight):

7.8g

絶縁抵抗(Insulation resist.) :

Min 10M Ω at DC500V (Between frame and leadwire)

耐電圧(Voltage withstand):

5mA (AC500V 1minute or AC600V 1 second, between frame and leadwire)

★In room temperature and humidity ★★In room humidity Room temp.=20±15°C, Room humidity=65±20%

0203

Specifications subject to change without notice. Copyright ©2002 Shicoh Engineering Co., Ltd.

<http://www.shicoh.com>

 SHICOH