


F2510AP TYPE

1ボール1スリーブ
(25x25x10.2mm)

Dimensions: Not to scale

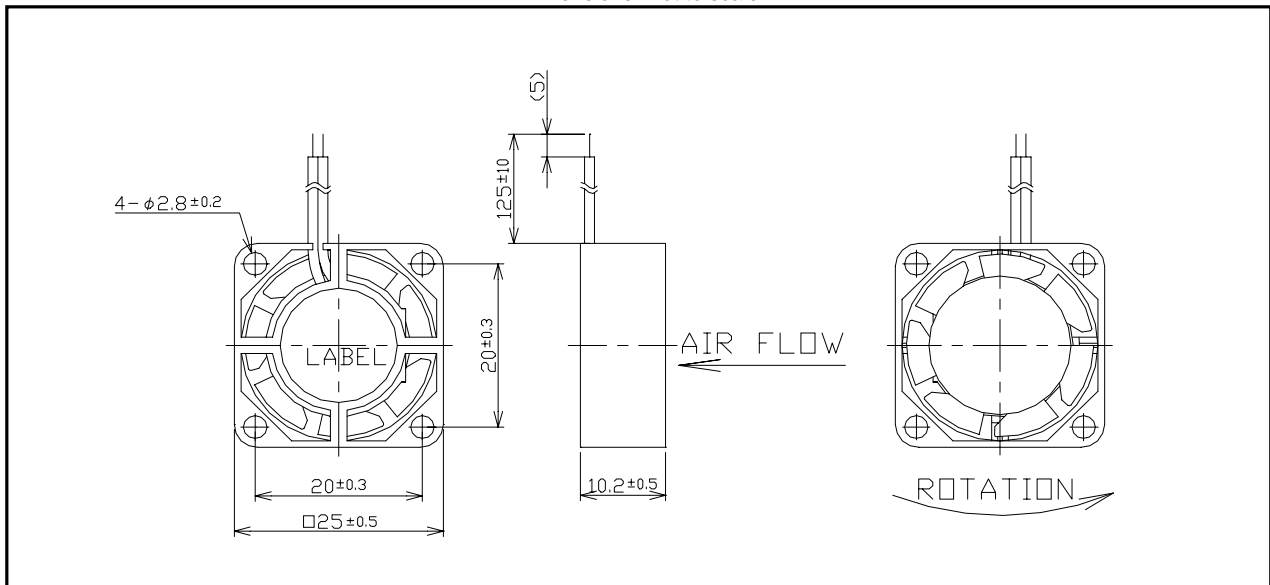

Specifications

機種名 (Model)	F2510AP-05SCW F2510AP-05VCW F2510AP-12VCW					
定格電圧 (DCV)	5	5	12			
Rated voltage						
使用電圧範囲 (DCV)	4.5~5.5	4.5~5.5	10.2~13.8			
Operating voltage range						
定格電流 (A)	0.09	0.12	0.09			
Rated current						
定格入力 (W)	0.45	0.6	1.08			
Rated input						
最大風量 (m ³ /min)	0.025	0.038	0.038			
Max Air Volume						
最大静圧 (Pa)	12.7	20.6	20.6			
Max Static Pressure						
A特性音圧レベル (dB)	22	25	25			
Noise Lv at 1m (A-weighted)						
回転速度 (min ⁻¹)	6,000	8,500	8,500			
Rotation frequency						
期待寿命 (h)	50,000					
Life expectancy	★			Room temp-humidity		

使用温度範囲(Operating temp. range) :

-5~+60°C(5V), -10 ~ +60°C(12V) ★★

保存温度範囲(Strage temp. range) :

-40 ~ +70 ★★

リード線(Lead Wire) :

UL1007 AWG28: {5V: Red(+), Green(-)}, {12V: Red(+), Black(-)}

重量(Weight):

7.8g

絶縁抵抗(Insulation resist.) :

Min 10M Ω at DC500V (Between frame and leadwire)

耐電圧(Voltage withstand):

5mA (AC500V 1minute or AC600V 1 second, between frame and leadwire)

★In room temperature and humidity ★★In room humidity Room temp.=20±15°C, Room humidity=65±20%

0203

Specifications subject to change without notice. Copyright ©2002 Shicoh Engineering Co., Ltd.

<http://www.shicoh.com>

