


# F2510EB TYPE

循環軸受け/メタルインペラ  
(25x25x10mm)

Dimensions: Not to scale

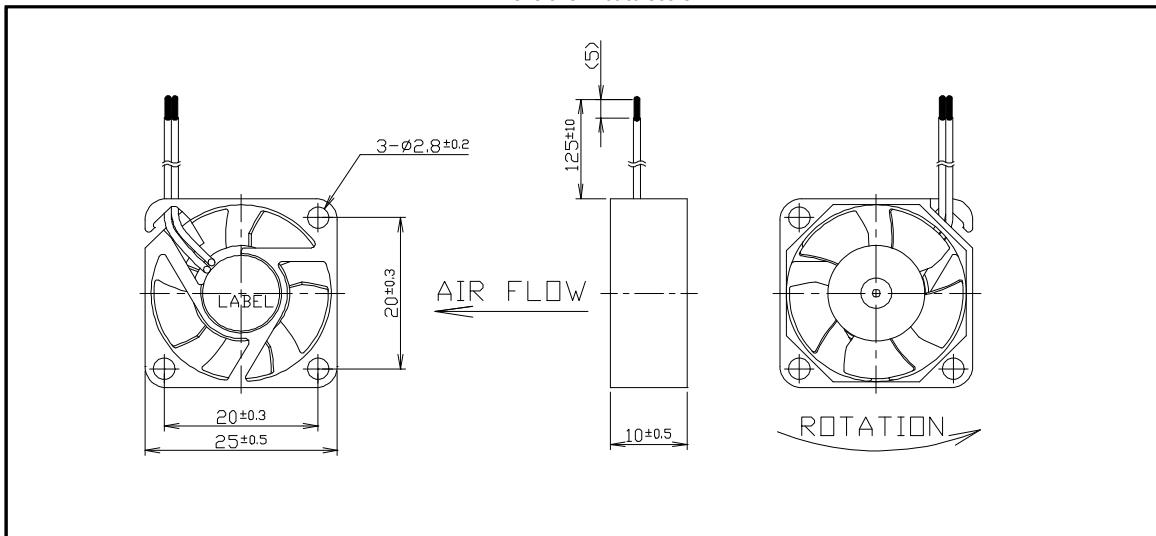

## Specifications

機種名 (Model)	F2510EB-05SCV				
定格電圧 (DCV)	5				
Rated voltage					
使用電圧範囲 (DCV)	4.5~5.5				
Operating voltage range					
定格電流 (A)	0.08				
Rated current					
定格入力 (W)	0.04				
Rated input					
最大風量 (m3/min)	0.08				
Max Air Volume					
最大静圧 (Pa)	20.0				
Max Static Pressure					
A特性音圧レベル (dB)	35				
Noise Lv at 0.2m (A-weighted)	(20cm)				
回転速度 (min <sup>-1</sup> )	6,500				
Rotation frequency					
期待寿命 (h)	20,000				
Life expectancy ★	Room temp-humidity				

使用温度範囲(Operating temp. range) :	-30 ~ +85°C(12V) ★★
保存温度範囲(Strage temp. range) :	-30 ~ +85°C★★
リード線(Lead Wire) :	UL1571 AWG28: {5V: Red(+), Green(-)}, {12V: Red(+), Black(-)}
重量(Weight):	6.0g
絶縁抵抗(Insulation resist.) :	Min 10M Ω at DC500V (Between frame and leadwire)
耐電圧(Voltage withstand):	5mA (AC500V 1minute or AC600V 1 second, between frame and leadwir

★In room temperature and humidity ★★In room humidity Room temp.=20±15°C, Room humidity=65±20% 0203  
Specifications subject to change without notice. Copyright ©2002 Shicoh Engineering Co., Ltd.

<http://www.shicoh.com>

 **SHICOH**