


F4010APTYPE

1ポール1スリーブ
(40x40x10mm)

Dimensions: Not to scale

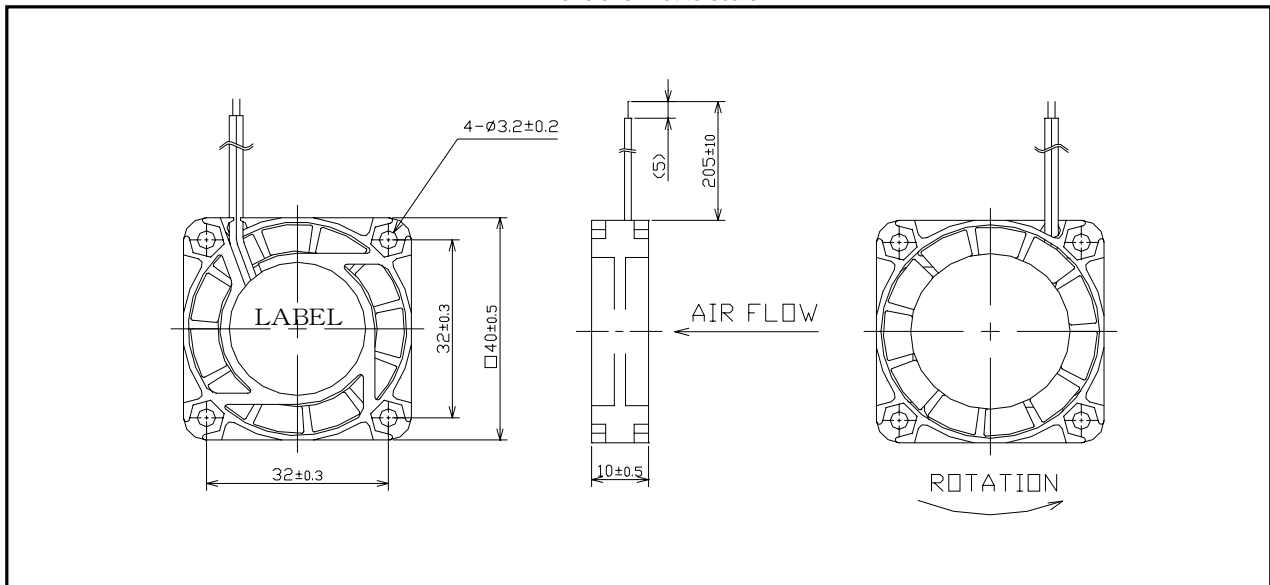

Specifications

機種名 (Model)	F4010AP-05QCW F4010AP-12PCW F4010AP-12RCW F4010AP-12SCW F4010AP-24SCW				
定格電圧 (DCV) Rated voltage	5	12	12	12	24
使用電圧範囲 (DCV) Operating voltage range	4.5~5.5	10.2~13.8	10.2~13.8	10.2~13.8	20.4~27.6
定格電流 (A) Rated current	0.18	0.08	0.1	0.12	0.07
定格入力 (W) Rated input	0.9	0.96	1.2	1.44	1.68
最大風量 (m ³ /min) Max Air Volume	0.1	0.05	0.1	0.11	0.11
最大静圧 (Pa) Max Static Pressure	22.5	15.7	22.5	34.3	34.3
A特性音圧レベル (dB) Noise Lv at 1m (A-weighted)	30	25	30	33	33
回転速度 (min ⁻¹) Rotation frequency	5,200	4,400	5,400	6,200	6,000
期待寿命 (h) Life expectancy	50,000 Room temp-humidity				

使用温度範囲(Operating temp. range): -5~+60°C(5V), -10 ~ +60°C(12V, 24V) ★★

保存温度範囲(Strage temp. range): -40 ~ +70 ★★

リード線(Lead Wire): UL2468 AWG26: {Red(+), Green(-)}, {12V: Red(+), Black(-)}, {24V: Red(+), Blue(-)}

重量(Weight): 18g

絶縁抵抗(Insulation resist.): Min 10M Ω at DC500V (Between frame and leadwire)

耐電圧(Voltage withstand): 5mA (AC500V 1minute or AC600V 1 second, between frame and leadwire)

★In room temperature and humidity ★★In room humidity Room temp.=20±15°C, Room humidity=65±20%

0203

Specifications subject to change without notice. Copyright ©2002 Shicoh Engineering Co., Ltd.

<http://www.shicoh.com>

